


Product Specification of:

## O<sub>2</sub> - Industrial Sensor / Type I-08

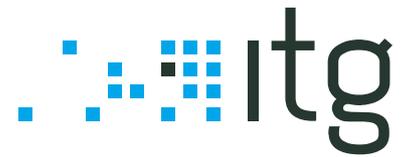

### :: KEY FEATURE ::

**Galvanic gas sensor with high output voltage, designed to be used for high resolutions between 0 and 25 Vol.% O<sub>2</sub>.**

*All characteristics are based on conditions at 25°C, 50% RH and 1013 hPa.*

<b>Measurement Range:</b>	0 to 25 Vol.%
<b>Expected Operating Life:</b>	~ 500,000 Vol.% h
<b>Sensor Lifetime:</b>	< 3 years @ ambient air
<b>Electrical Connector:</b>	3-pin Molex®
<b>Gas Connector:</b>	M16 x 1 Thread
<b>Initial Output Signal:</b>	70.0 to 90.0 mV @ dry ambient air
<b>Response Time t<sub>90</sub>:</b>	< 5 s
<b>Drift:</b>	< 10 % per year
<b>Linearity Error:</b>	0 to 2 Vol.% O <sub>2</sub> : ± 0.1 absolute 2.1 to 25 Vol.% O <sub>2</sub> : ± 0.5 relative
<b>Operating Temperature:</b>	0 to 50 °C
<b>Pressure Range:</b>	700 to 1250 hPa
<b>Influence of Humidity:</b>	- 0.03 % rel. O <sub>2</sub> reading per % RH
<b>Temperature Compensation:</b>	NTC
<b>Recommended Load Resistor:</b>	≥ 10 kOhm
<b>Interferences:</b>	< 0.1 % O <sub>2</sub> response to: 12.0 Vol.% CO <sub>2</sub> , balance N <sub>2</sub> 1,000 ppm Benzene, balance N <sub>2</sub> 1.5 % CH <sub>4</sub> , alternating with air                1,900 ppm NO, balance to N <sub>2</sub> 1,000 ppm CO, balance N <sub>2</sub> 1,000 ppm SO <sub>2</sub> , balance N <sub>2</sub> 800 ppm H <sub>2</sub>
<b>Weight:</b>	approximately 25 g
<b>Material in Contact with Media:</b>	PA, PPS, PTFE, stainless steel



### :: STORAGE CONDITIONS ::

<b>Temperature Range:</b>	recommended: 5 to 30 °C maximum: - 20 to 50 °C
<b>Humidity:</b>	up to 100 % RH
<b>Ambient Pressure:</b>	600 to 1750 hPa
<b>Shelf Life:</b>	< 3 months recommended

### :: RELATED PRODUCTS ::

Product	Part-No.	Housing Colour
O <sub>2</sub> - Sensor I-08	48 00 23	black

*This data sheet is subject to change without prior notice. [I-08-Rev\_022012.doc]*

page 1 of 1